


Carbide Punches with Self-Contained Ejector Pin, Carbide Head and Hardened Steel Collar

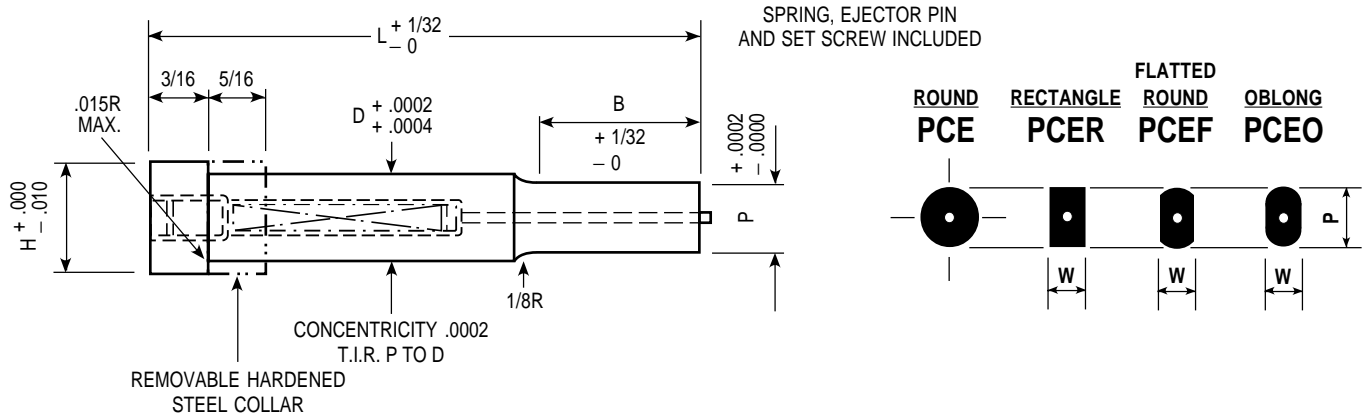

CATALOG NUMBER	D DIAMETER	P POINT DIAMETER	B POINT LENGTH	H HEAD DIAMETER	L = LENGTH									
					2	2¼	2½	2¾	3	3¼	3½	3¾	4	
* 1PCE-H18	.1875	.093 - .1259	3/4"	.250	•	•	•	•	•	•	•	•	•	•
* 2PCE-H18	.1875	.126 - .1875	7/8"	.250	•	•	•	•	•	•	•	•	•	•
1PCE-H25	.250	.093 - .1259	3/4"	.340	•	•	•	•	•	•	•	•	•	•
2PCE-H25	.250	.126 - .250	7/8"	.340	•	•	•	•	•	•	•	•	•	•
1PCE-H31	.3125	.125 - .2499	7/8"	.400	•	•	•	•	•	•	•	•	•	•
2PCE-H31	.3125	.250 - .3125	7/8"	.400	•	•	•	•	•	•	•	•	•	•
1PCE-H37	.375	.187 - .3139	7/8"	.460	•	•	•	•	•	•	•	•	•	•
2PCE-H37	.375	.314 - .375	7/8"	.460	•	•	•	•	•	•	•	•	•	•
1PCE-H43	.4375	.314 - .3749	7/8"	.562	•	•	•	•	•	•	•	•	•	•
2PCE-H43	.4375	.375 - .4375	7/8"	.562	•	•	•	•	•	•	•	•	•	•
1PCE-H50	.500	.375 - .4379	7/8"	.625	•	•	•	•	•	•	•	•	•	•
2PCE-H50	.500	.438 - .500	7/8"	.625	•	•	•	•	•	•	•	•	•	•
1PCE-H62	.625	.438 - .5299	7/8"	.750	•	•	•	•	•	•	•	•	•	•
2PCE-H62	.625	.530 - .625	7/8"	.750	•	•	•	•	•	•	•	•	•	•

NOTE: ANY DIMENSION OTHER THAN THOSE SHOWN QUOTED ON REQUEST

All outside corners to be sharp unless otherwise specified by customer.

WHEN ORDERING SPECIFY:

Quantity	Catalog Number	L	P
3	1PCE-H31	2½"	.1265"

Quantity	Catalog Number	L	Point Dimensions
12	1PCER-H31	3"	W = .1875" P = .1500"

* Head Thickness = 1/8" with 3/8" Steel Collar.



This catalog covers +.0002/+0.0004" tolerance die components.
For +.00005/-0.00000" tolerance die components, please refer to our precision catalog.